


15. WATERN HEATER BB 150 V/S1-2L

With one coil. Vertical models.

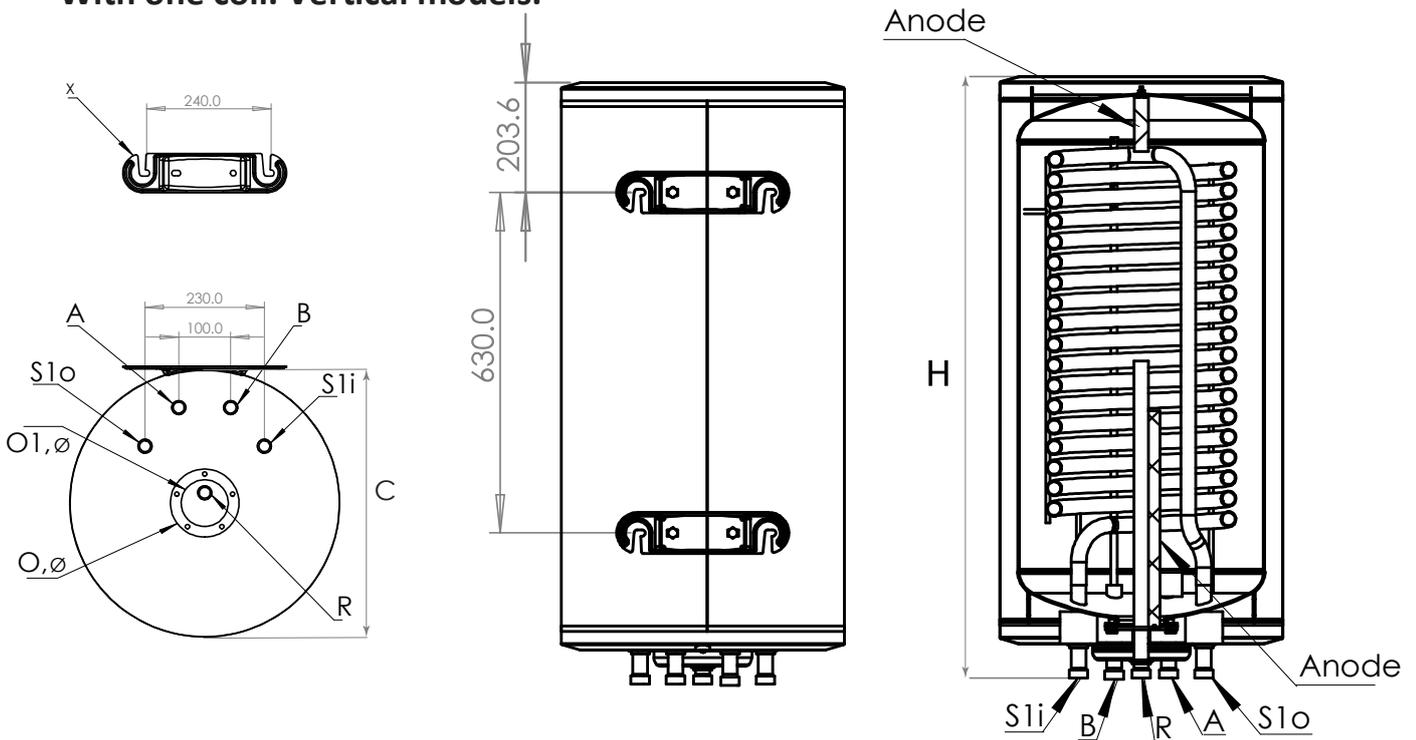

B 150 V/S1-2L		
Capacity	L	150
Height	H, mm	1110
Diameter	D, mm	∅ 520
Insulation	mm	rigid PPU, thickness 32 mm
Oper. pressure / max. temperature	MPa(bar)/°C	0.8(8)/95
Test pressure of tank	MPa(bar)	1.3(13)
Weight	kg	74
Cold water inlet	A, mm	Rp 3/4"
Hot water outlet	B, mm	Rp 3/4"
Oper. pressure / max. Coil temp.S1	MPa(bar)/°C	1.6(16)/110
Test pressure S1	MPa(bar)	2.5(25)
Coil capacity S1	L	8.67
Heat exchange surface S1	m²	1.8
Coil inlet	S1i,mm, Rp 3/4"	0
Coil outlet	S1o,mm, Rp3/4"	0
Recirculation	R, mm, Rp3/4"	0
Prolonged power acc. to DIN 4708; 80°C/60°C/45°C, S1	kW (m³/h)	32(0.37)
NL – power coefficient at 60°C, S1	NL 60°C	3.1
Pressure drop Δp, S1	Δp, mbar	72
Inspection opening/Flange	O, O1, ∅, mm	132/90
Anode	P1, P2	✓/✓
Wall prop/ Distance between both stands	X1, mm	630