

TeltoCharge



THE FUTURE OF CHARGING ON YOUR WALL

Easy, smart and reliable EV charger that you can customize to your needs. We offer an exceptional product that combines functionality, premium looks, high-quality build and smart EV charging features to save you time and money.

TECHNICAL DATASHEET


A



B



DIMENSIONS



COLOR OPTIONS




FRONT PLATE FINISH



OUTPUT OPTIONS



CONNECTIVITY TYPES

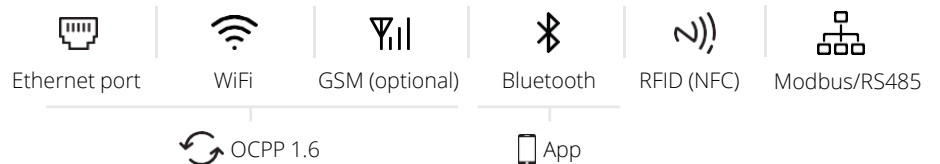

KEY BENEFITS



POWERFUL

Up to 22 kW of charging capacity, allowing you to quickly charge your EV.



CONNECTED

Connect TeltoCharge to 3rd party OCPP Cloud platform via Wi-Fi/LAN/GSM. Or manage it with mobile device via Bluetooth.



COMPATIBLE

It is compatible with every electric vehicle and Plug-in (PHEV) hybrid now and in the future.



SECURE

Quick and easy EV charging authorization with NFC card or application, to prevent unwanted use.



CONVENIENT

Dynamic LED lights showing charging status, authentication and more.



RELIABLE

TeltoCharge is IP55 and IK10 rated, meaning that it can withstand even the harshest outdoors weather.

DETAILED SPECIFICATIONS



CONNECTION POINT

- A. Tethered cable with Type 2 outlet (IEC 62196-2)
- B. Type 2 socket (IEC 62196-2)



CERTIFICATIONS

CE & UKCA compliant

Codes and standards:
EMC: 2014/53/EU, IEC 61851-21;
Safety: IEC/EN 61851-1;
Environment: 2011/65/EU, REACH, RoHS



WARRANTY

36 months



DEVICE CONNECTIVITY

WiFi 2.4 GHz b/g/n connection	Yes
Bluetooth low energy	Yes
Local management via APP	Yes
NFC reader	Yes
OCPP 1.6	Yes
Ethernet (RJ45)	Yes
4G/LTE (CAT1), 3G, 2G (optional)	Yes



PROTECTION

Output voltage and current monitoring	Yes
Temperature monitoring	Yes
Input voltage monitoring	Yes
Residual current monitoring (30mA AC / 6 mA DC) Standart: IEC62752:2016	Yes*
Ground fault detection	Yes
Degree of protection	IP56
Impact resistant	IK10
Fire class	UL94
Vibration Resistant	



TETHERED CABLE

Flame retardant rating	UL-94V-0
Operating temperature	-30°C - +50°C
Plug and play count	10000
Cable length	5 m / 7.5 m
IP rating	IP55
Socket	Type 2



CHARGING SPECIFICATION

Max 22kW
Up to 7.36kW at 32A 1 phase
Up to 22kW at 32A 3 phase
Dynamic configuration



NETWORK TYPE

T/N and IT/TT



VOLTAGE

±
Single phase: 230 V (10%)
Three phase: 400 V (10%)



MAIN FREQUENCY

50/60 Hz



OPERATING SPECIFICATIONS

Humidity to 95% RH non condensing;
-30°C - +50°C



TEMPERATURE SENSORS

In all main components



LED LIGHTS

LEDs showing the status of the charger



BUILT-IN ENERGY METER

Statistical data tracking Yes















LOAD BALANCING AND SOLAR

Static load balancing	Yes
Dynamic load balancing	Yes
Phase balancing	Yes
Universal Solar Integration	Yes



TELTOCHARGE PRODUCT CODES

PRODUCT GROUP	PRODUCT CODE	FRONT PANEL COLOR	CHARGING CAPACITY	OUTPUT	MODEM
EVC100	EVC1000P4011	Slate grey	7.4kW	 type 2 socket	-
	EVC1010P1000	Slate grey	7.4kW	 type 2 cable (5m)	-
EVC101	EVC1010W1011	Wooden	7.4kW	 type 2 cable (5m)	-
	EVC1100P4011	Slate grey	11kW	 type 2 socket	-
EVC110	EVC1110P1000	Slate grey	11kW	 type 2 cable (5m)	-
	EVC1110W1011	Wooden	11kW	 type 2 cable (5m)	-
EVC111	EVC1200P4011	Slate grey	22kW	 type 2 socket	-
	EVC1201P4011	Slate grey	22kW	 type 2 socket	Quectel EG91-EX modem
EVC120	EVC1210P1000	Slate grey	22kW	 type 2 cable (5m)	-
	EVC1210W1011	Wooden	22kW	 type 2 cable (5m)	-
EVC121	EVC1211P1000	Slate grey	22kW	 type 2 cable (5m)	Quectel EG91-EX modem
	EVC1211W1011	Wooden	22kW	 type 2 cable (5m)	Quectel EG91-EX modem

TELTONIKA ENERGY APP

Manage all your device settings from your mobile phone or tablet through the Teltonika Energy application.

- > Pair your EV charger with your phone through smart Teltonika Energy application via Bluetooth Low Energy connection.
- > Set up your device and see statistics to your consumption.
- > Schedule charging when the power is cheapest.
- > Set the charging current according to your needs.
- > Lock your charger to protect it from unwanted users and more.

Compatible with your device



TELTONIKA ENERGY WIKI

wiki.teltonika-energy.com/view/TeltoCharge



TeltoCharge

